



DESIGN SHEET

K-NOPY™

PREMIUM ALUMINUM AWNING




01 Technical Specs





02 Warranty

03 Color Chart

04 Lighting

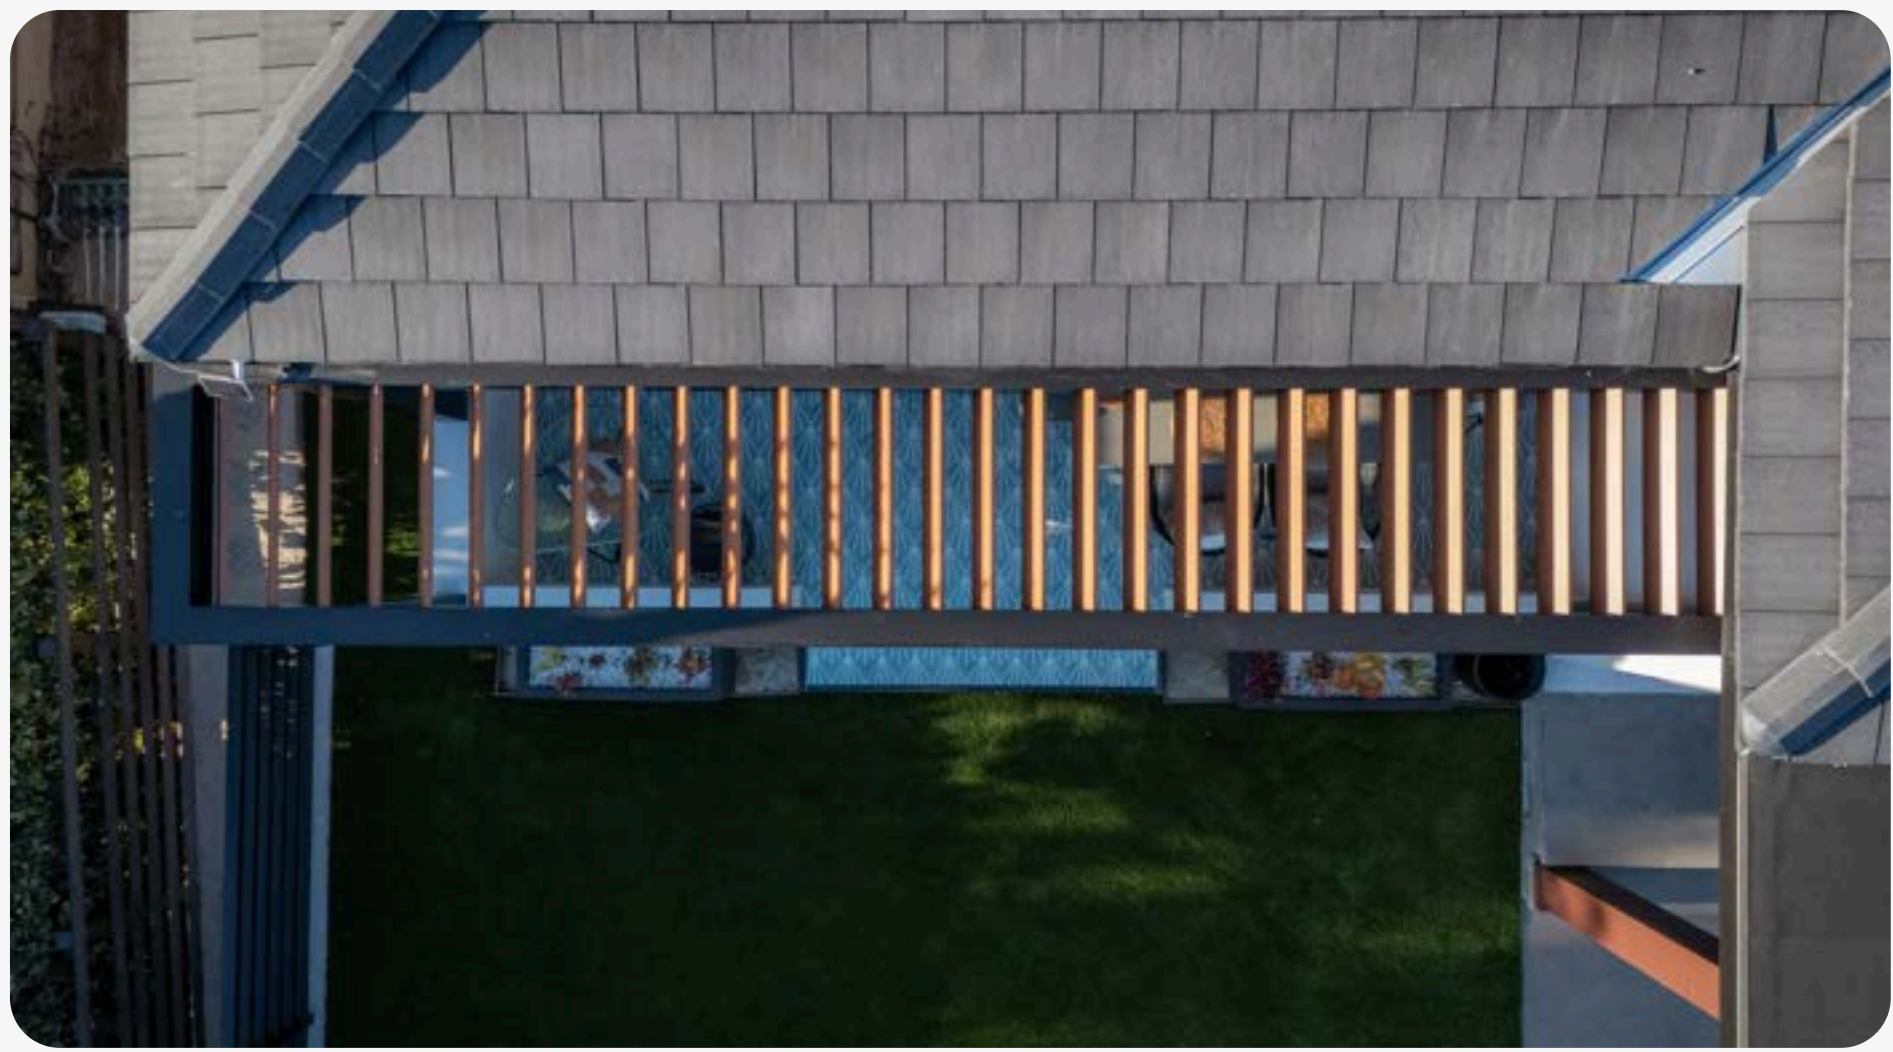


Configurations

	Braced K-NOPY 	Cantilever K-NOPY 
 55 Edition	✓ Available	● Slats parallel to wall only
 90 Edition	✓ Available	● Slats parallel to wall only
 Insulated Edition	✓ Available	× Not Available

Roof Editions

Technical Specs

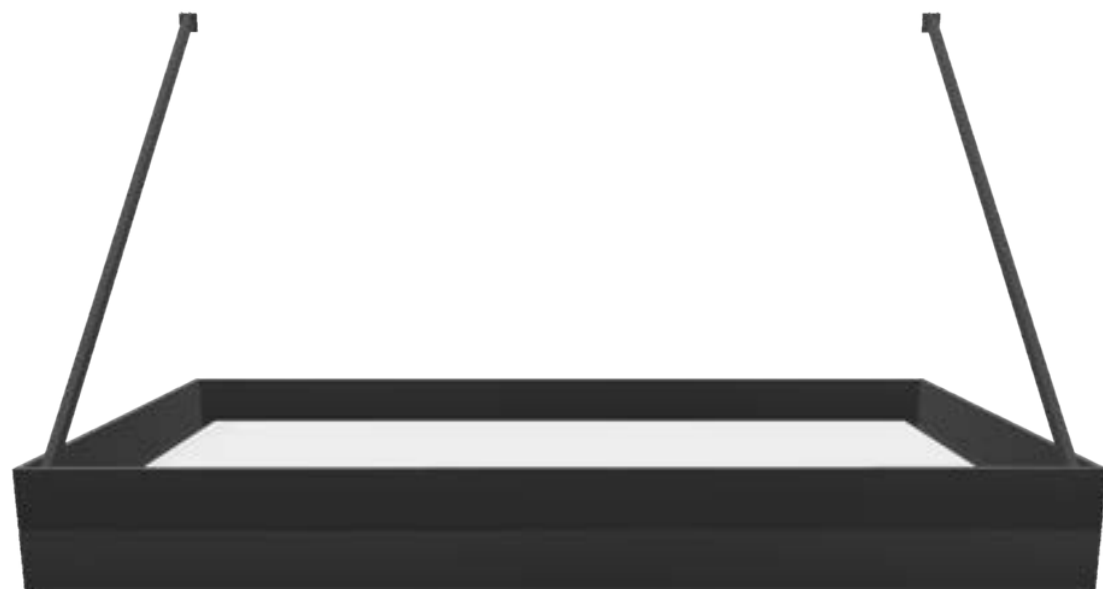

INSULATED EDITION

3" thick insulated panel
.03" Aluminum sheet



55 EDITION

5.5" x 1" at a 55° angle
8" spacing between slats




90 EDITION

5" x 1.5"
6.5" spacing between slats

Insulated Edition

Frame Specs

14" x 5 11/16"
double beam + gutter

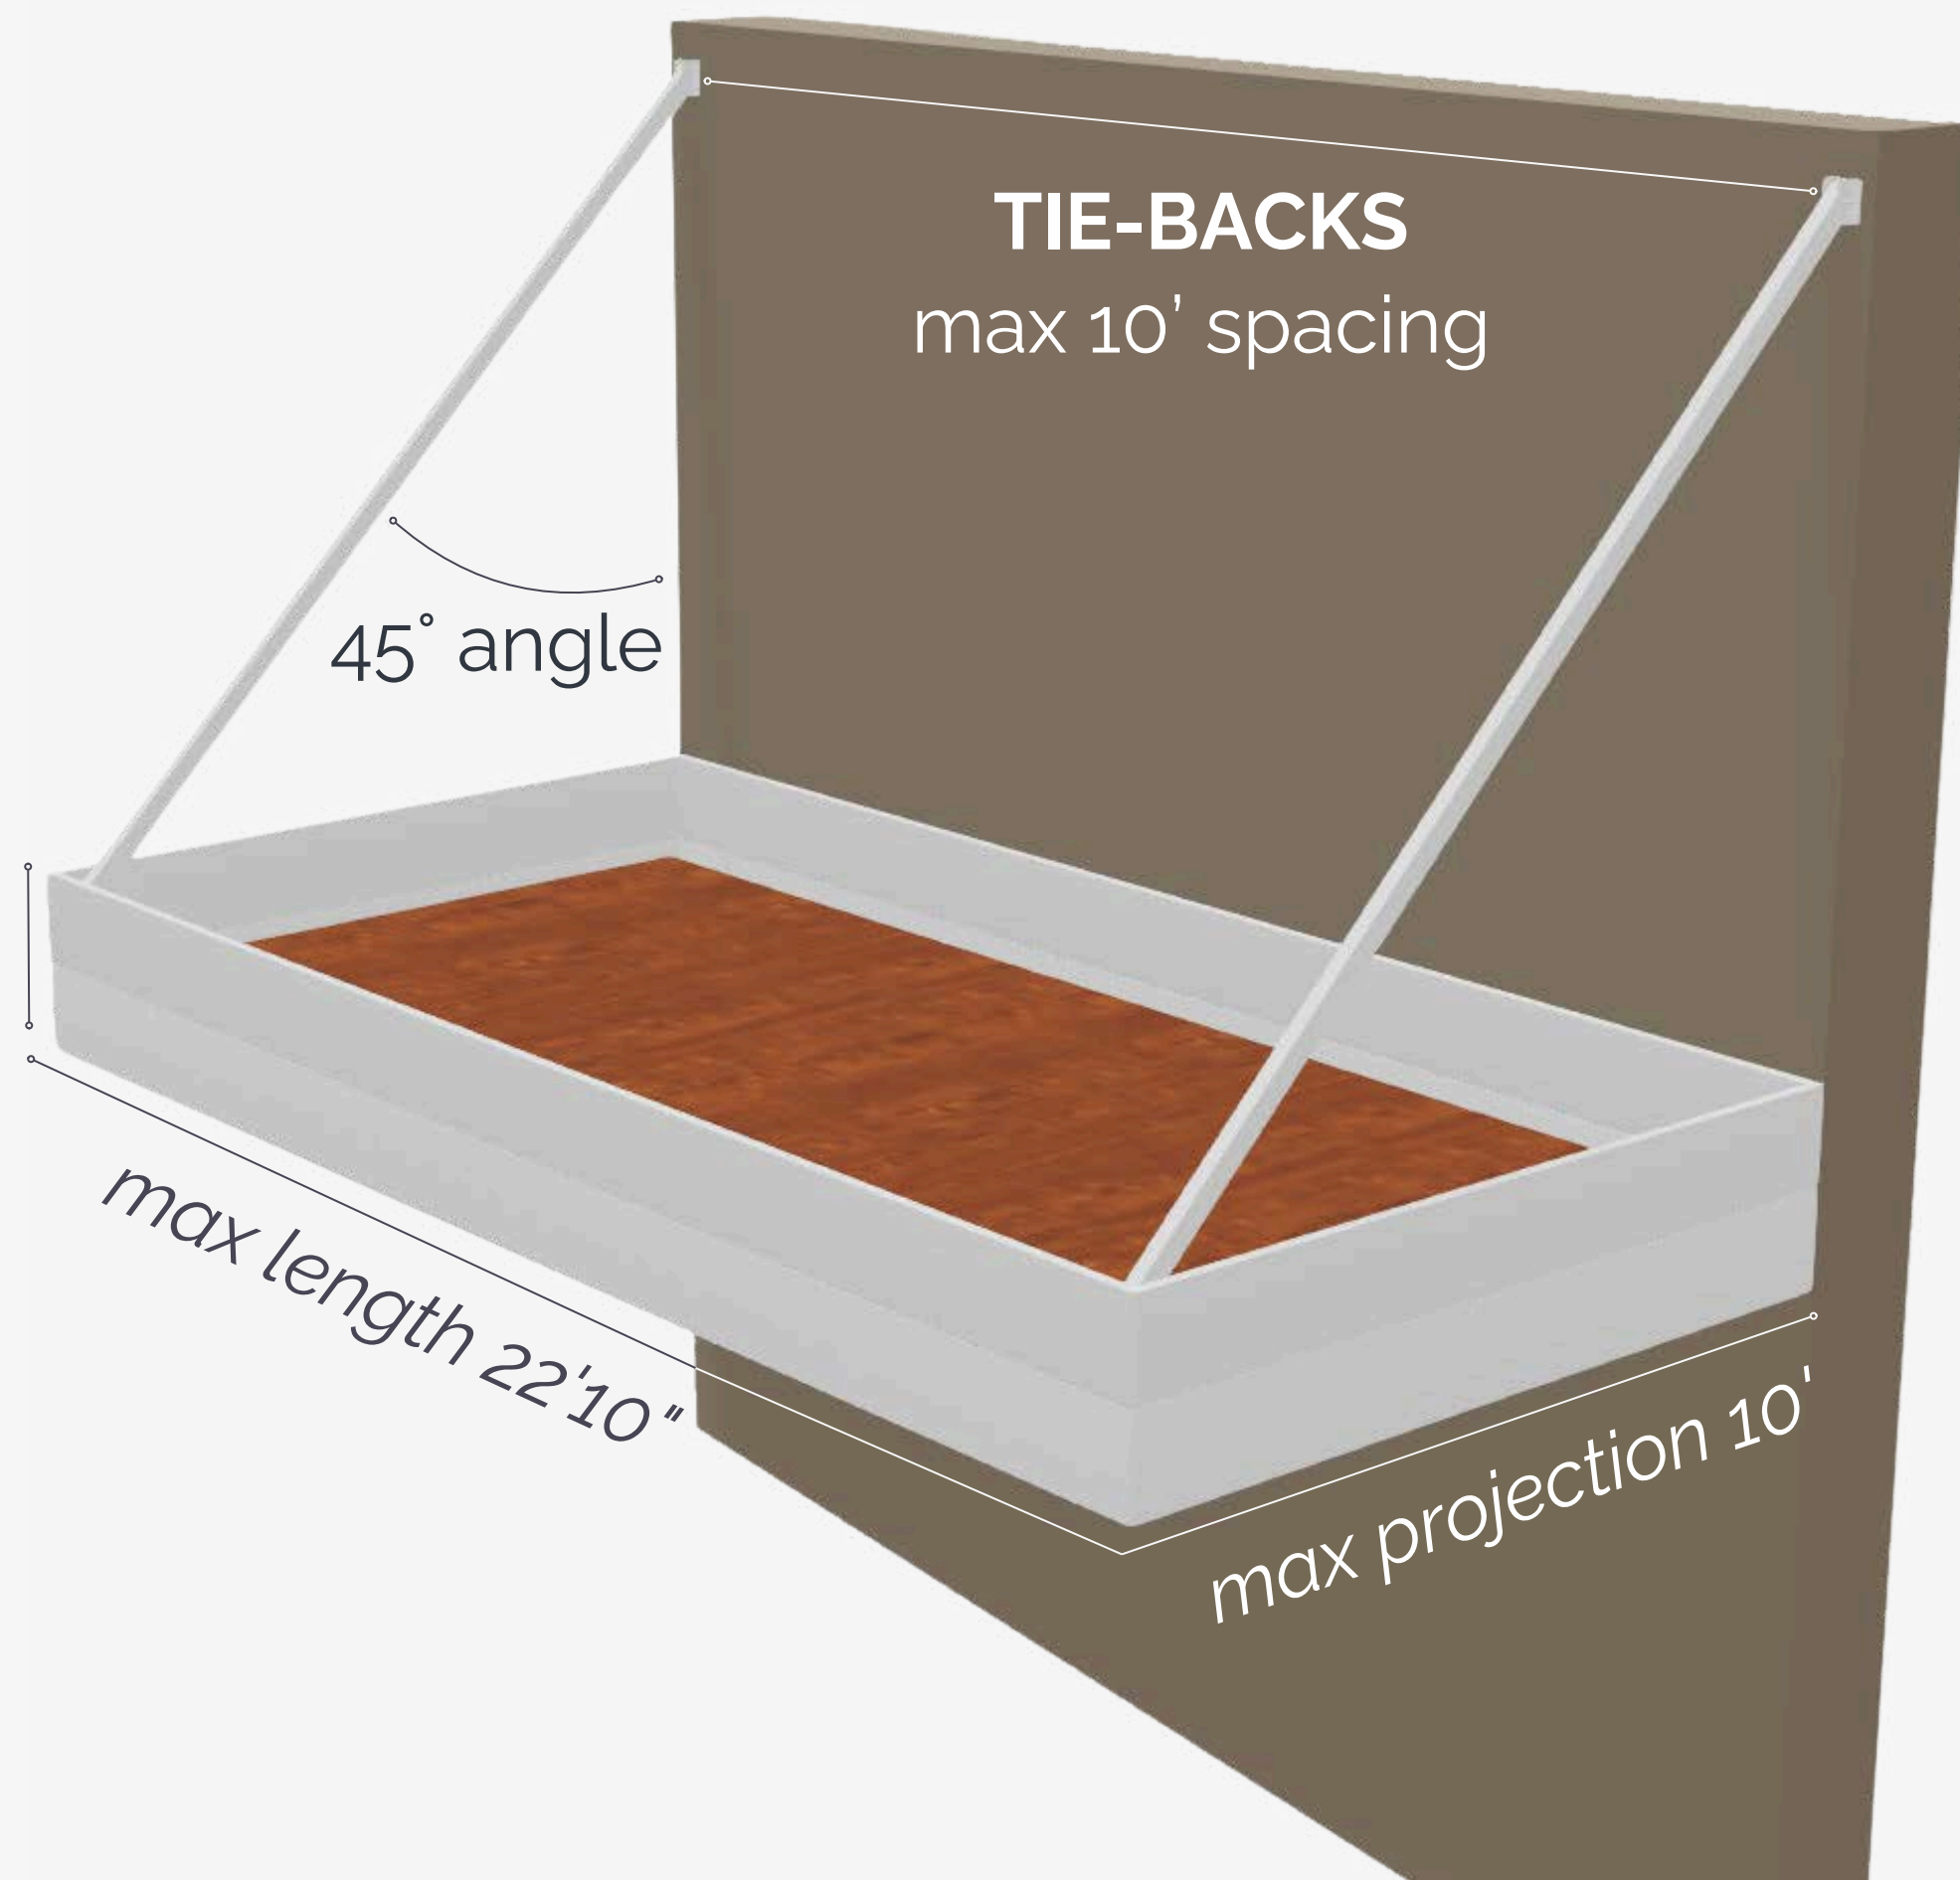


Insulated Edition

Drainage




- Scuppers placed along the gutter
- 2 scuppers provided per zone

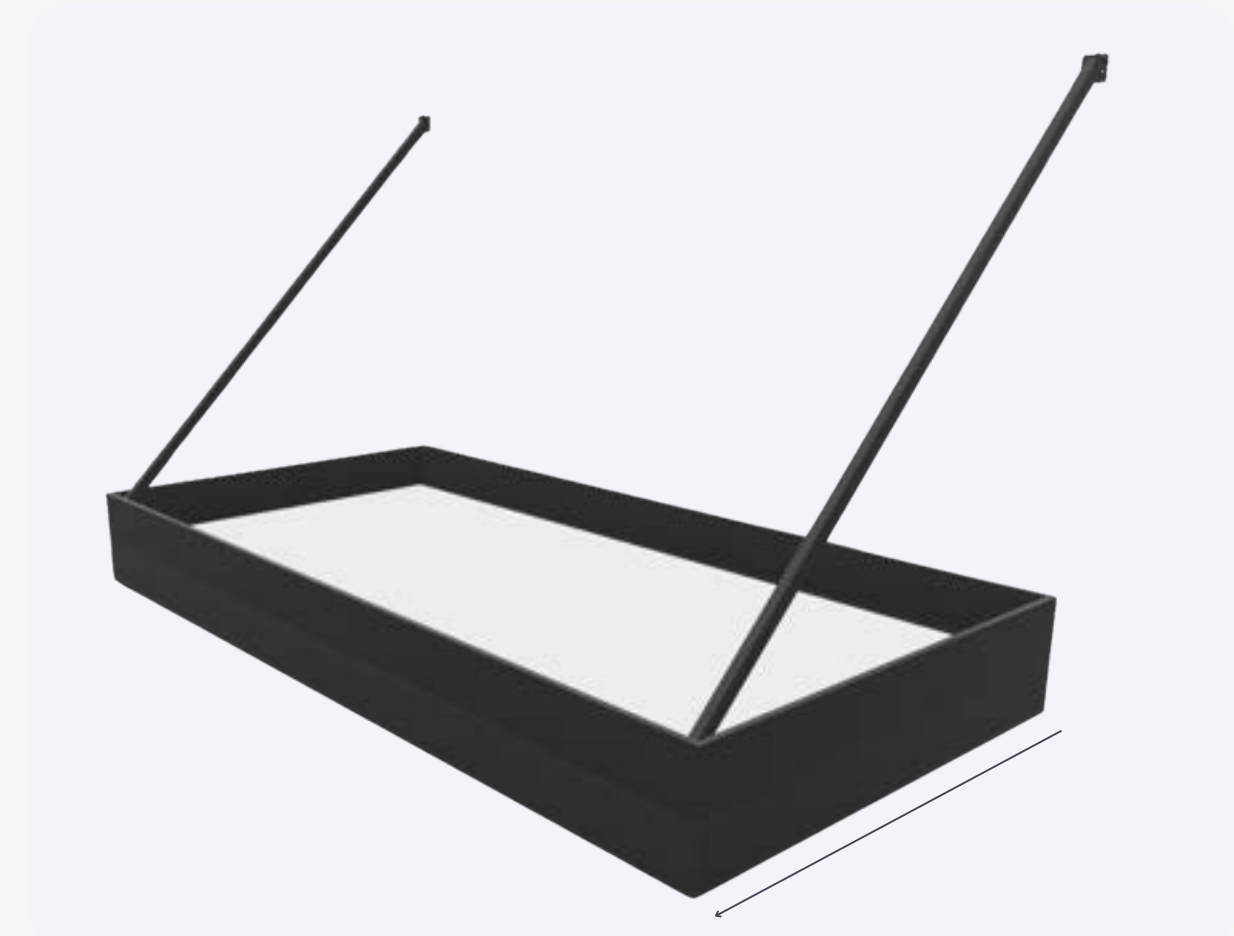

1/16" pitch per foot toward
the scupper


55 & 90 Editions

Frame Specs

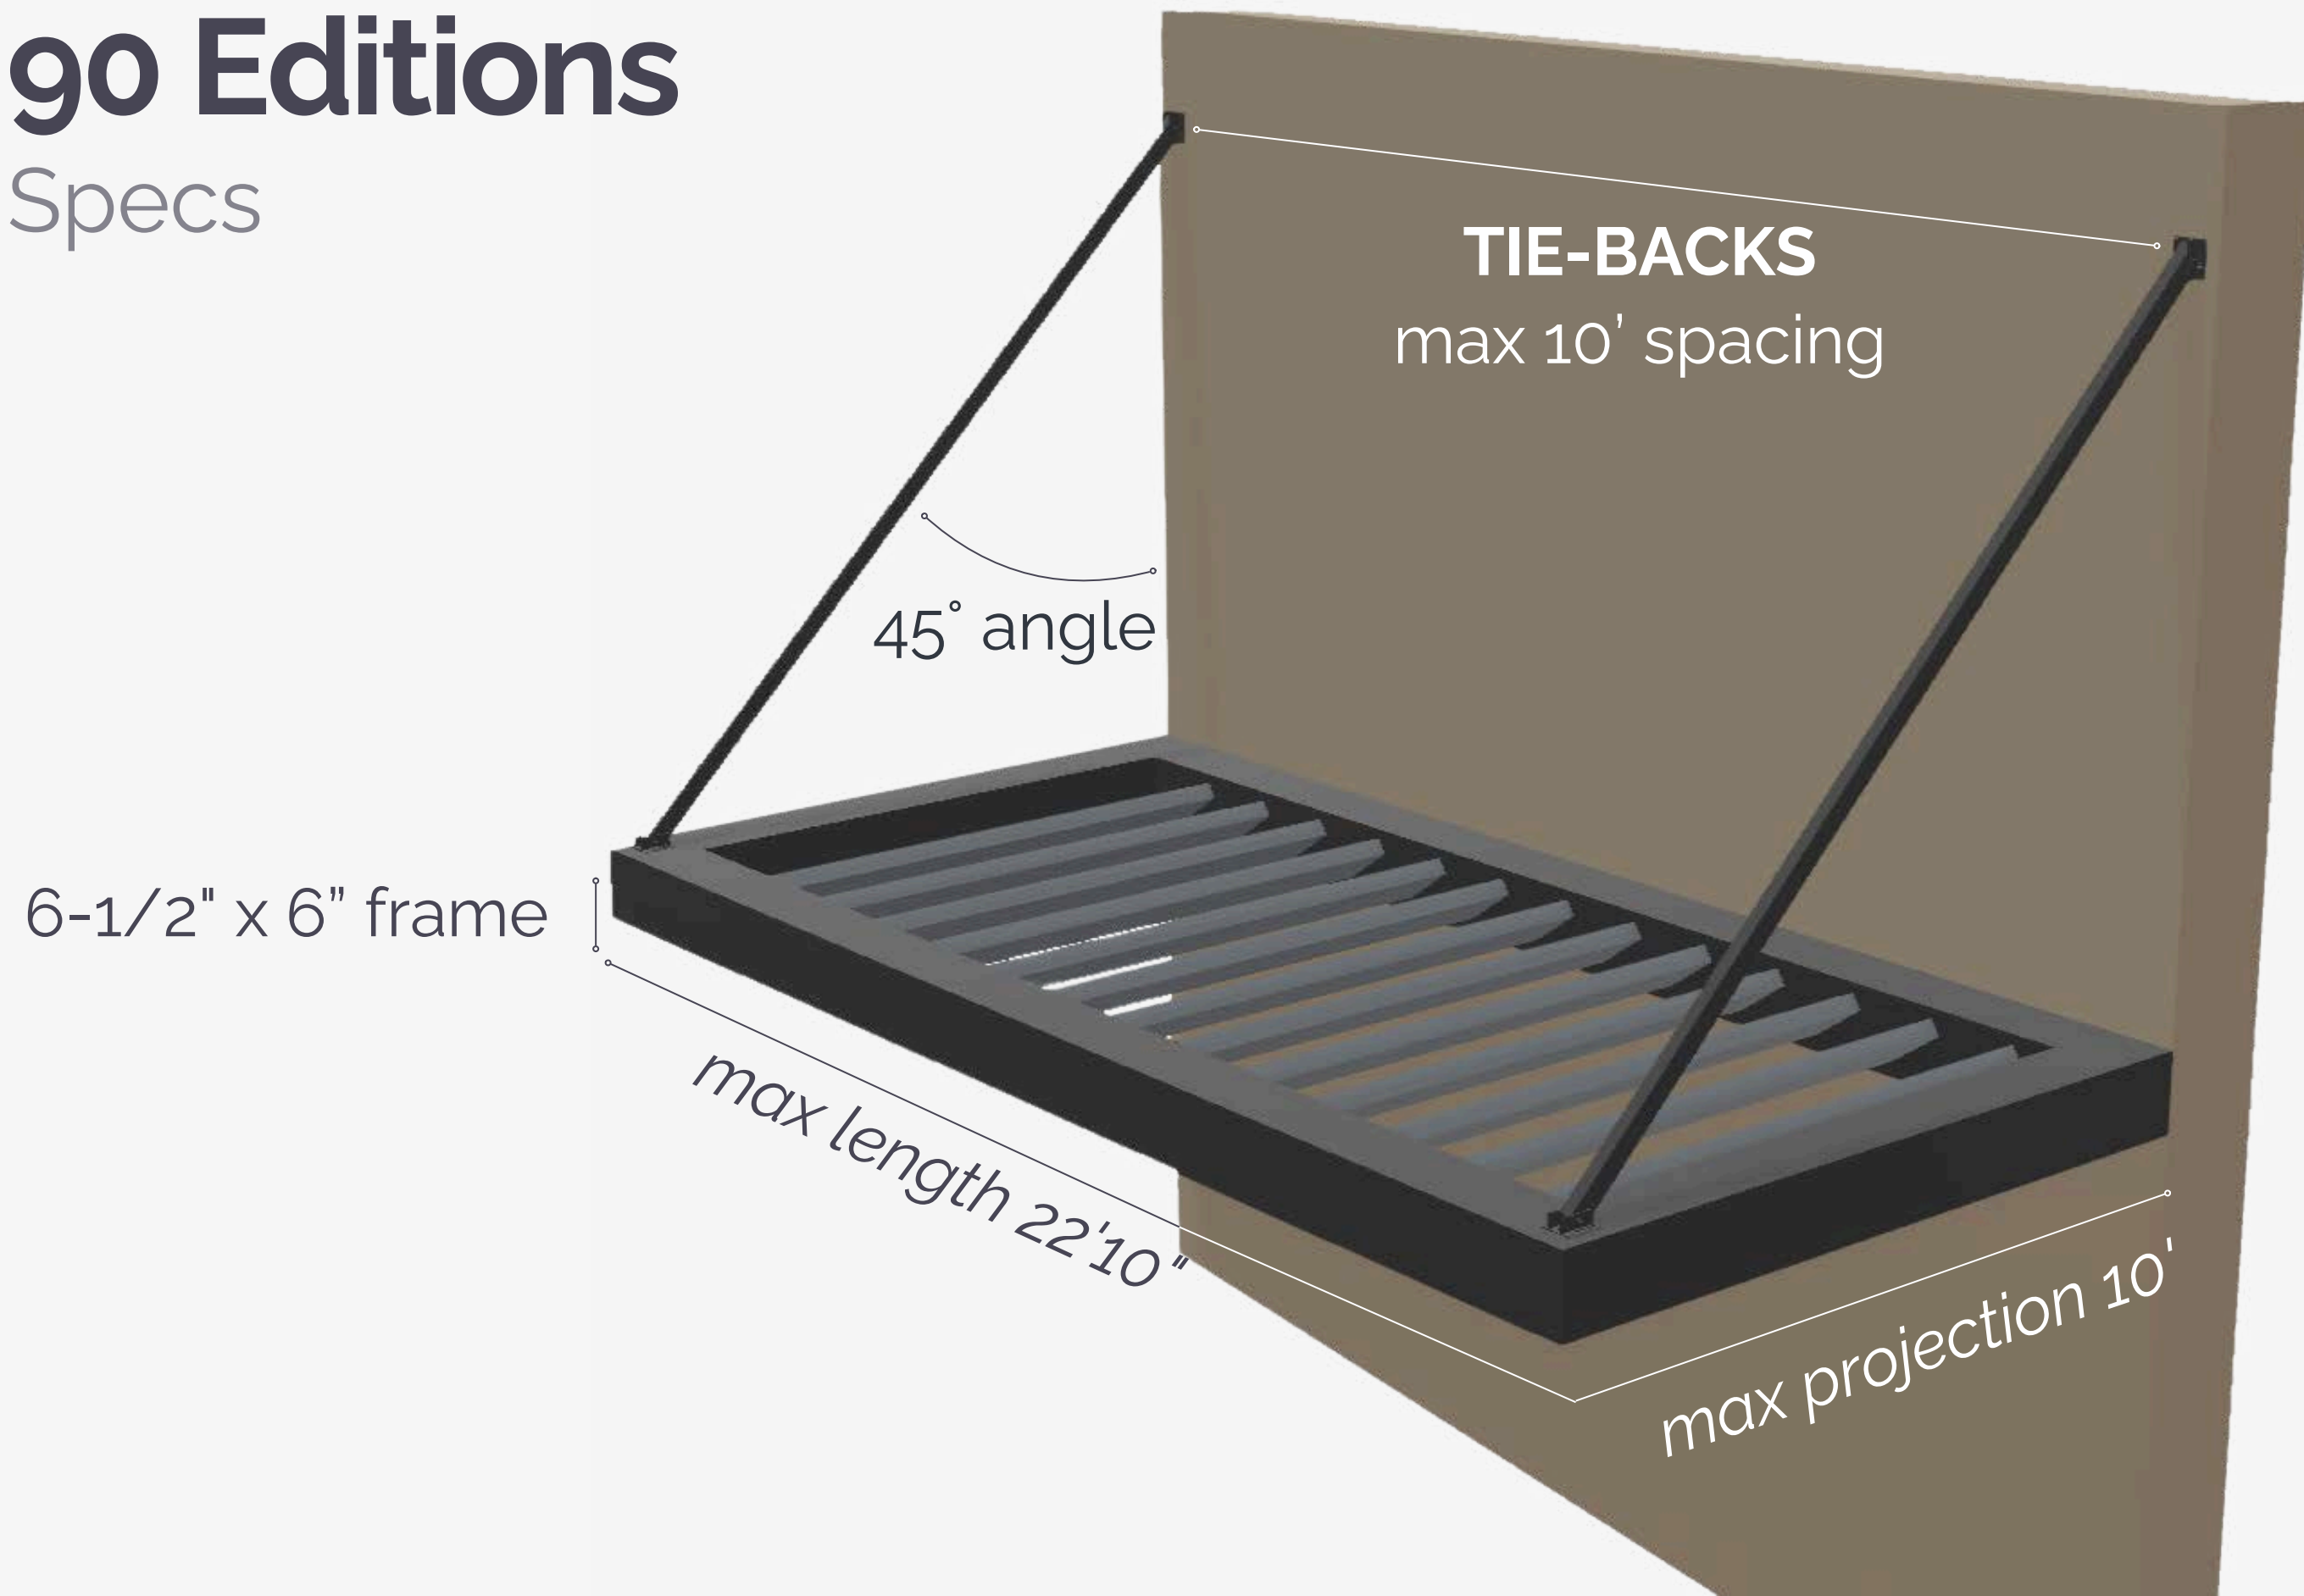


55 & 90 Editions


Support Beam

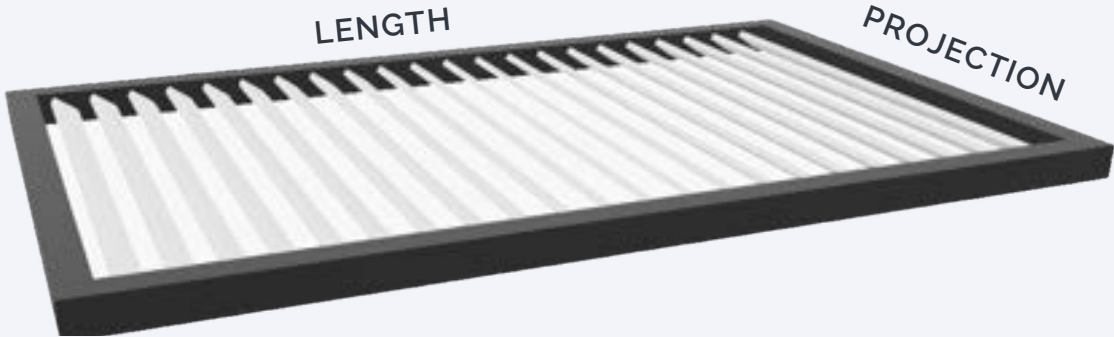

NO SUPPORT BEAM

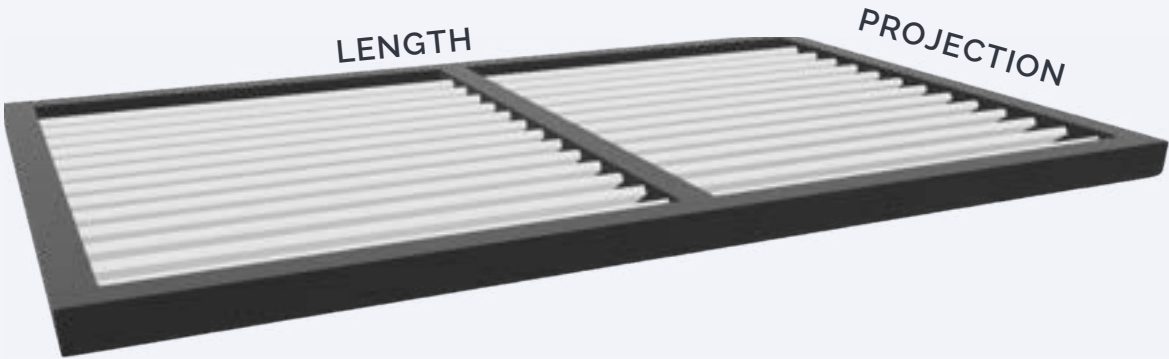


1 SUPPORT BEAM
every 10ft

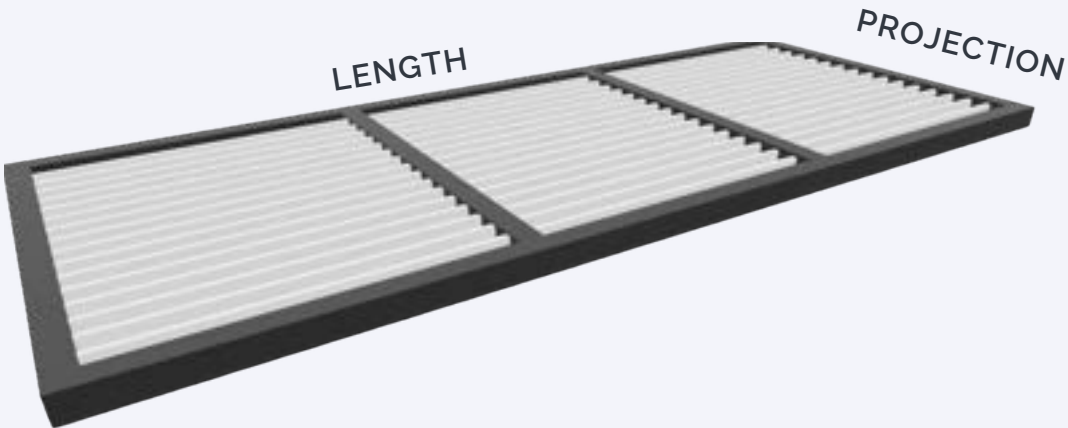

2 SUPPORT BEAMS
every 10ft

Wall-Mount System

Braced K-NOPY

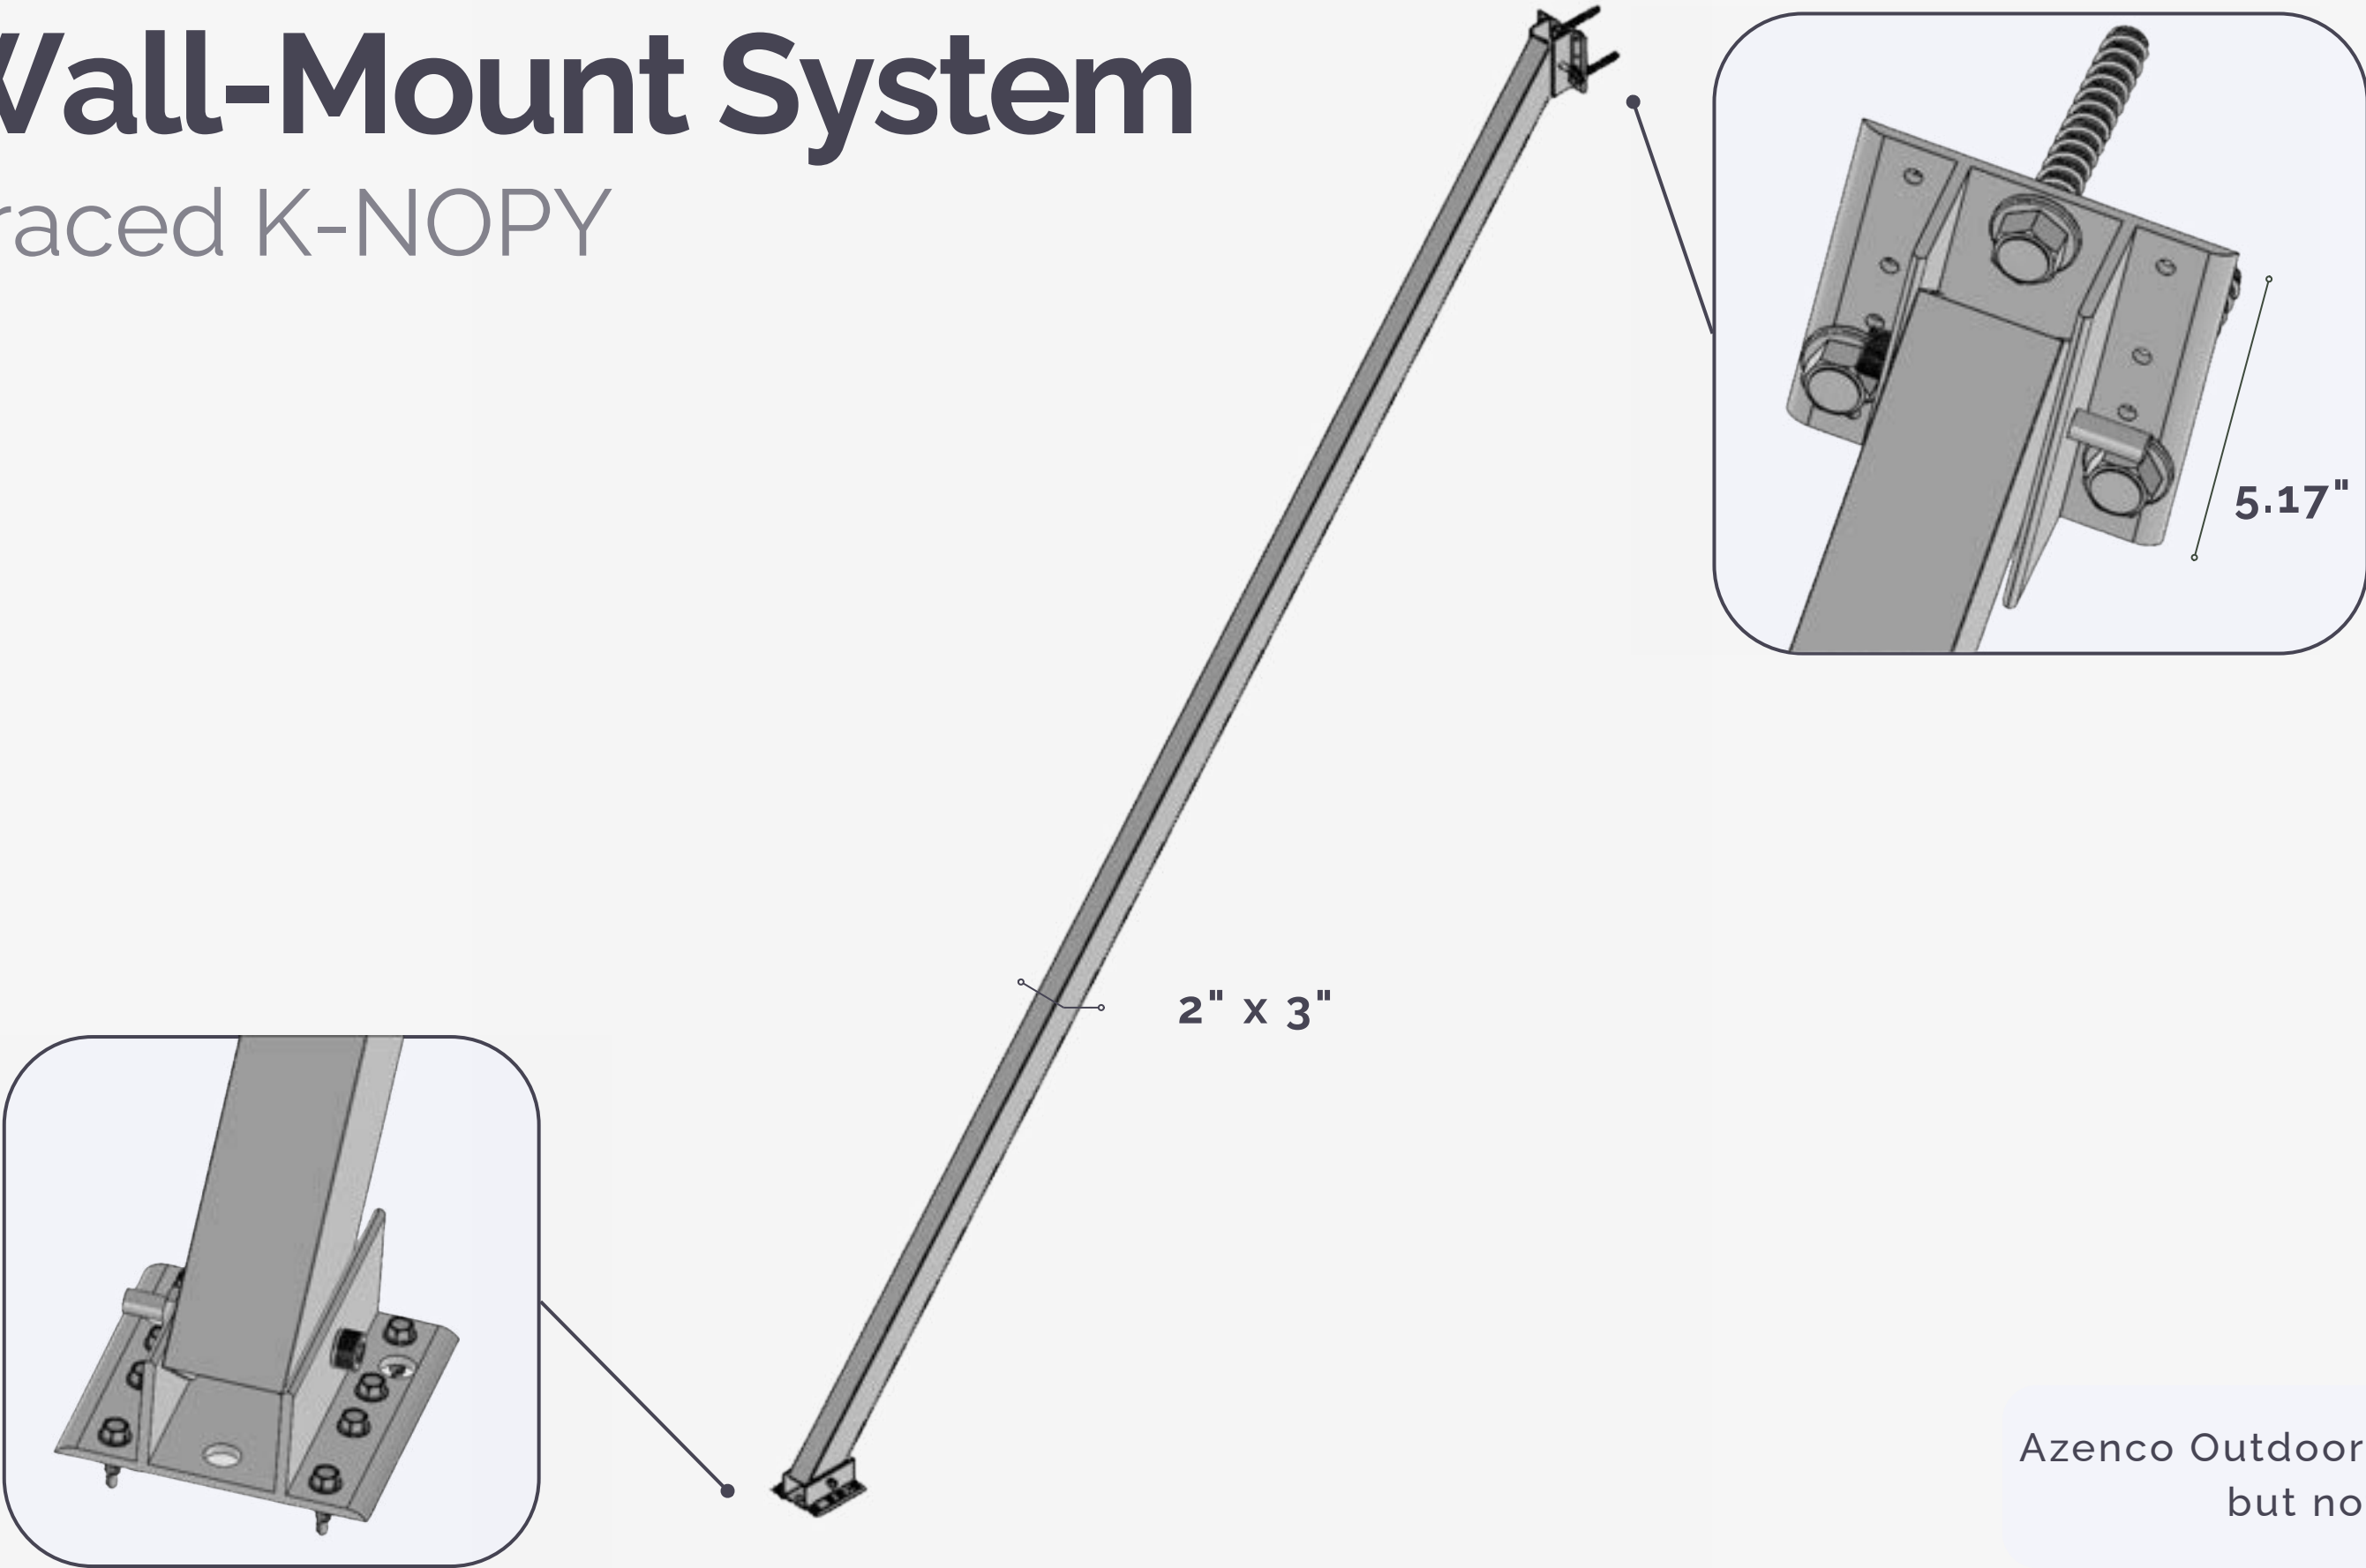


Azenco Outdoor supplies the frame screws, but not the wall anchors.

Wall-Mount System

Cantilever K-NOPY

PLATE DIMENSIONS
P53 DIMENSIONS
P54 INSIDE THE SUPPORT BEAM

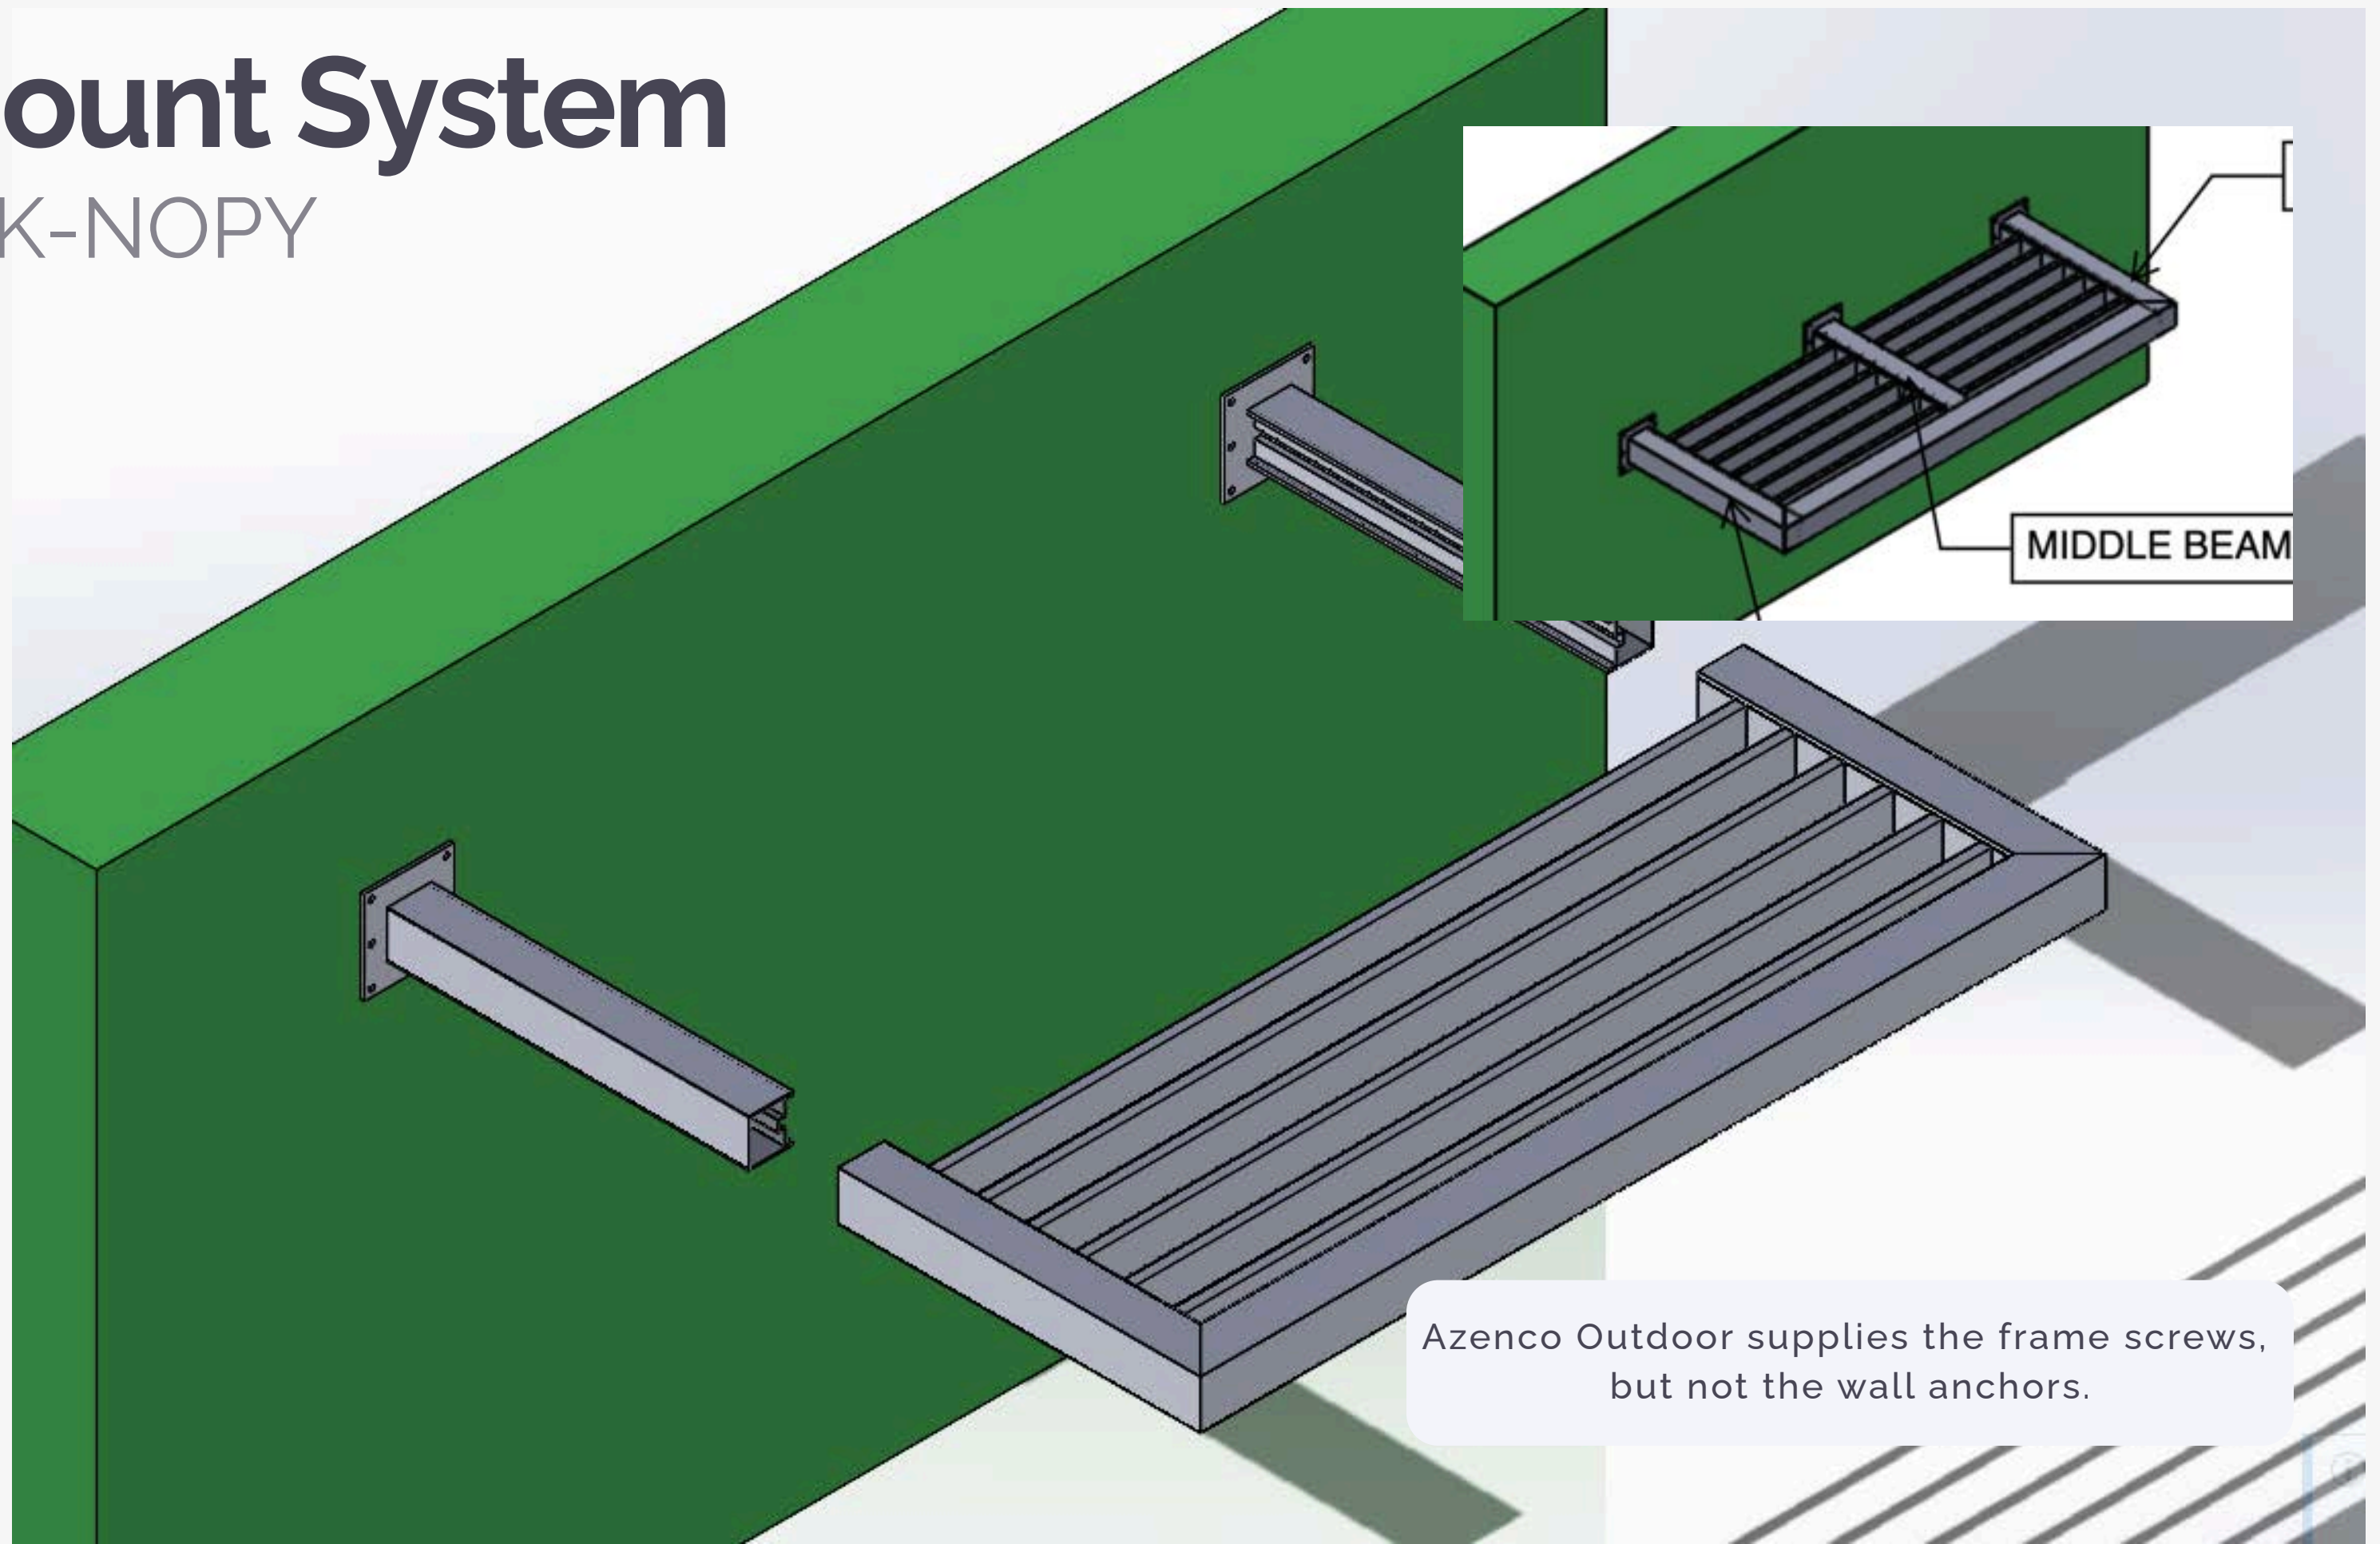



NEED WEIGHT FOR CANTILEVER
BRACKET + UPDATED WEIGHT

Weight

55 & 90 Editions

PROJECTION	LENGTH													TIE-BACK
ft	4'	5'	6'	7'	8'	10'	11'	13'	15'	17'	18'	20'	22'10"	
4'	143 lbs	143 lbs	140 lbs	181 lbs	165 lbs	199 lbs	254 lbs	277 lbs	328 lbs	351 lbs	351 lbs	397 lbs	426 lbs	9.7 lbs
5'	143 lbs	143 lbs	140 lbs	181 lbs	175 lbs	212 lbs	267 lbs	292 lbs	348 lbs	371 lbs	371 lbs	422 lbs	455 lbs	11.8 lbs
6'	132 lbs	147 lbs	141 lbs	185 lbs	184 lbs	256 lbs	269 lbs	299 lbs	367 lbs	390 lbs	390 lbs	450 lbs	494 lbs	13.8 lbs
7'	181 lbs	181 lbs	188 lbs	234 lbs	229 lbs	272 lbs	349 lbs	381 lbs	454 lbs	477 lbs	477 lbs	542 lbs	592 lbs	15.8 lbs
8'	158 lbs	173 lbs	178 lbs	226 lbs	226 lbs	275 lbs	330 lbs	366	451 lbs	474 lbs	474 lbs	548 lbs	609 lbs	17.8 lbs
9'	170 lbs	185 lbs	189 lbs	237 lbs	248 lbs	299 lbs	365 lbs	404 lbs	494 lbs	517 lbs	517 lbs	596 lbs	662 lbs	19.8 lbs
10'	196 lbs	211 lbs	213 lbs	264 lbs	280 lbs	335 lbs	412 lbs	456 lbs	557 lbs	580 lbs	580 lbs	668 lbs	746 lbs	21.8 lbs



NEED WEIGHT FOR CANTILEVER
BRACKET + UPDATED WEIGHT

Weight

Insulated Edition


PROJECTION	LENGTH									TIE-BACK
ft	8'	10'	11'	13'	15'	17'	18'	20'	22'10"	
4'	224 lbs	256 lbs	260 lbs	281 lbs	326 lbs	363 lbs	370 lbs	406 lbs	414 lbs	9.7 lbs
5'	227 lbs	260 lbs	264 lbs	285 lbs	330 lbs	312 lbs	328 lbs	410 lbs	418 lbs	11.8 lbs
6'	209 lbs	241 lbs	245 lbs	266 lbs	311 lbs	348 lbs	356 lbs	392 lbs	399 lbs	13.8 lbs
7'	260 lbs	292 lbs	296 lbs	317 lbs	362 lbs	399 lbs	407 lbs	443 lbs	450 lbs	15.8 lbs
8'	235 lbs	268 lbs	271 lbs	293 lbs	338 lbs	375 lbs	382 lbs	418 lbs	544 lbs	17.8 lbs
9'	246 lbs	278 lbs	282 lbs	303 lbs	348 lbs	385 lbs	393 lbs	429 lbs	436 lbs	19.8 lbs
10'	268 lbs	300 lbs	304 lbs	325 lbs	370 lbs	407 lbs	415 lbs	451 lbs	458 lbs	21.8 lbs

Warranty

15 years - standard color powdercoat
10 years - custom color powdercoat

15 years - aluminum structural components

3 years - electronic & electrical components

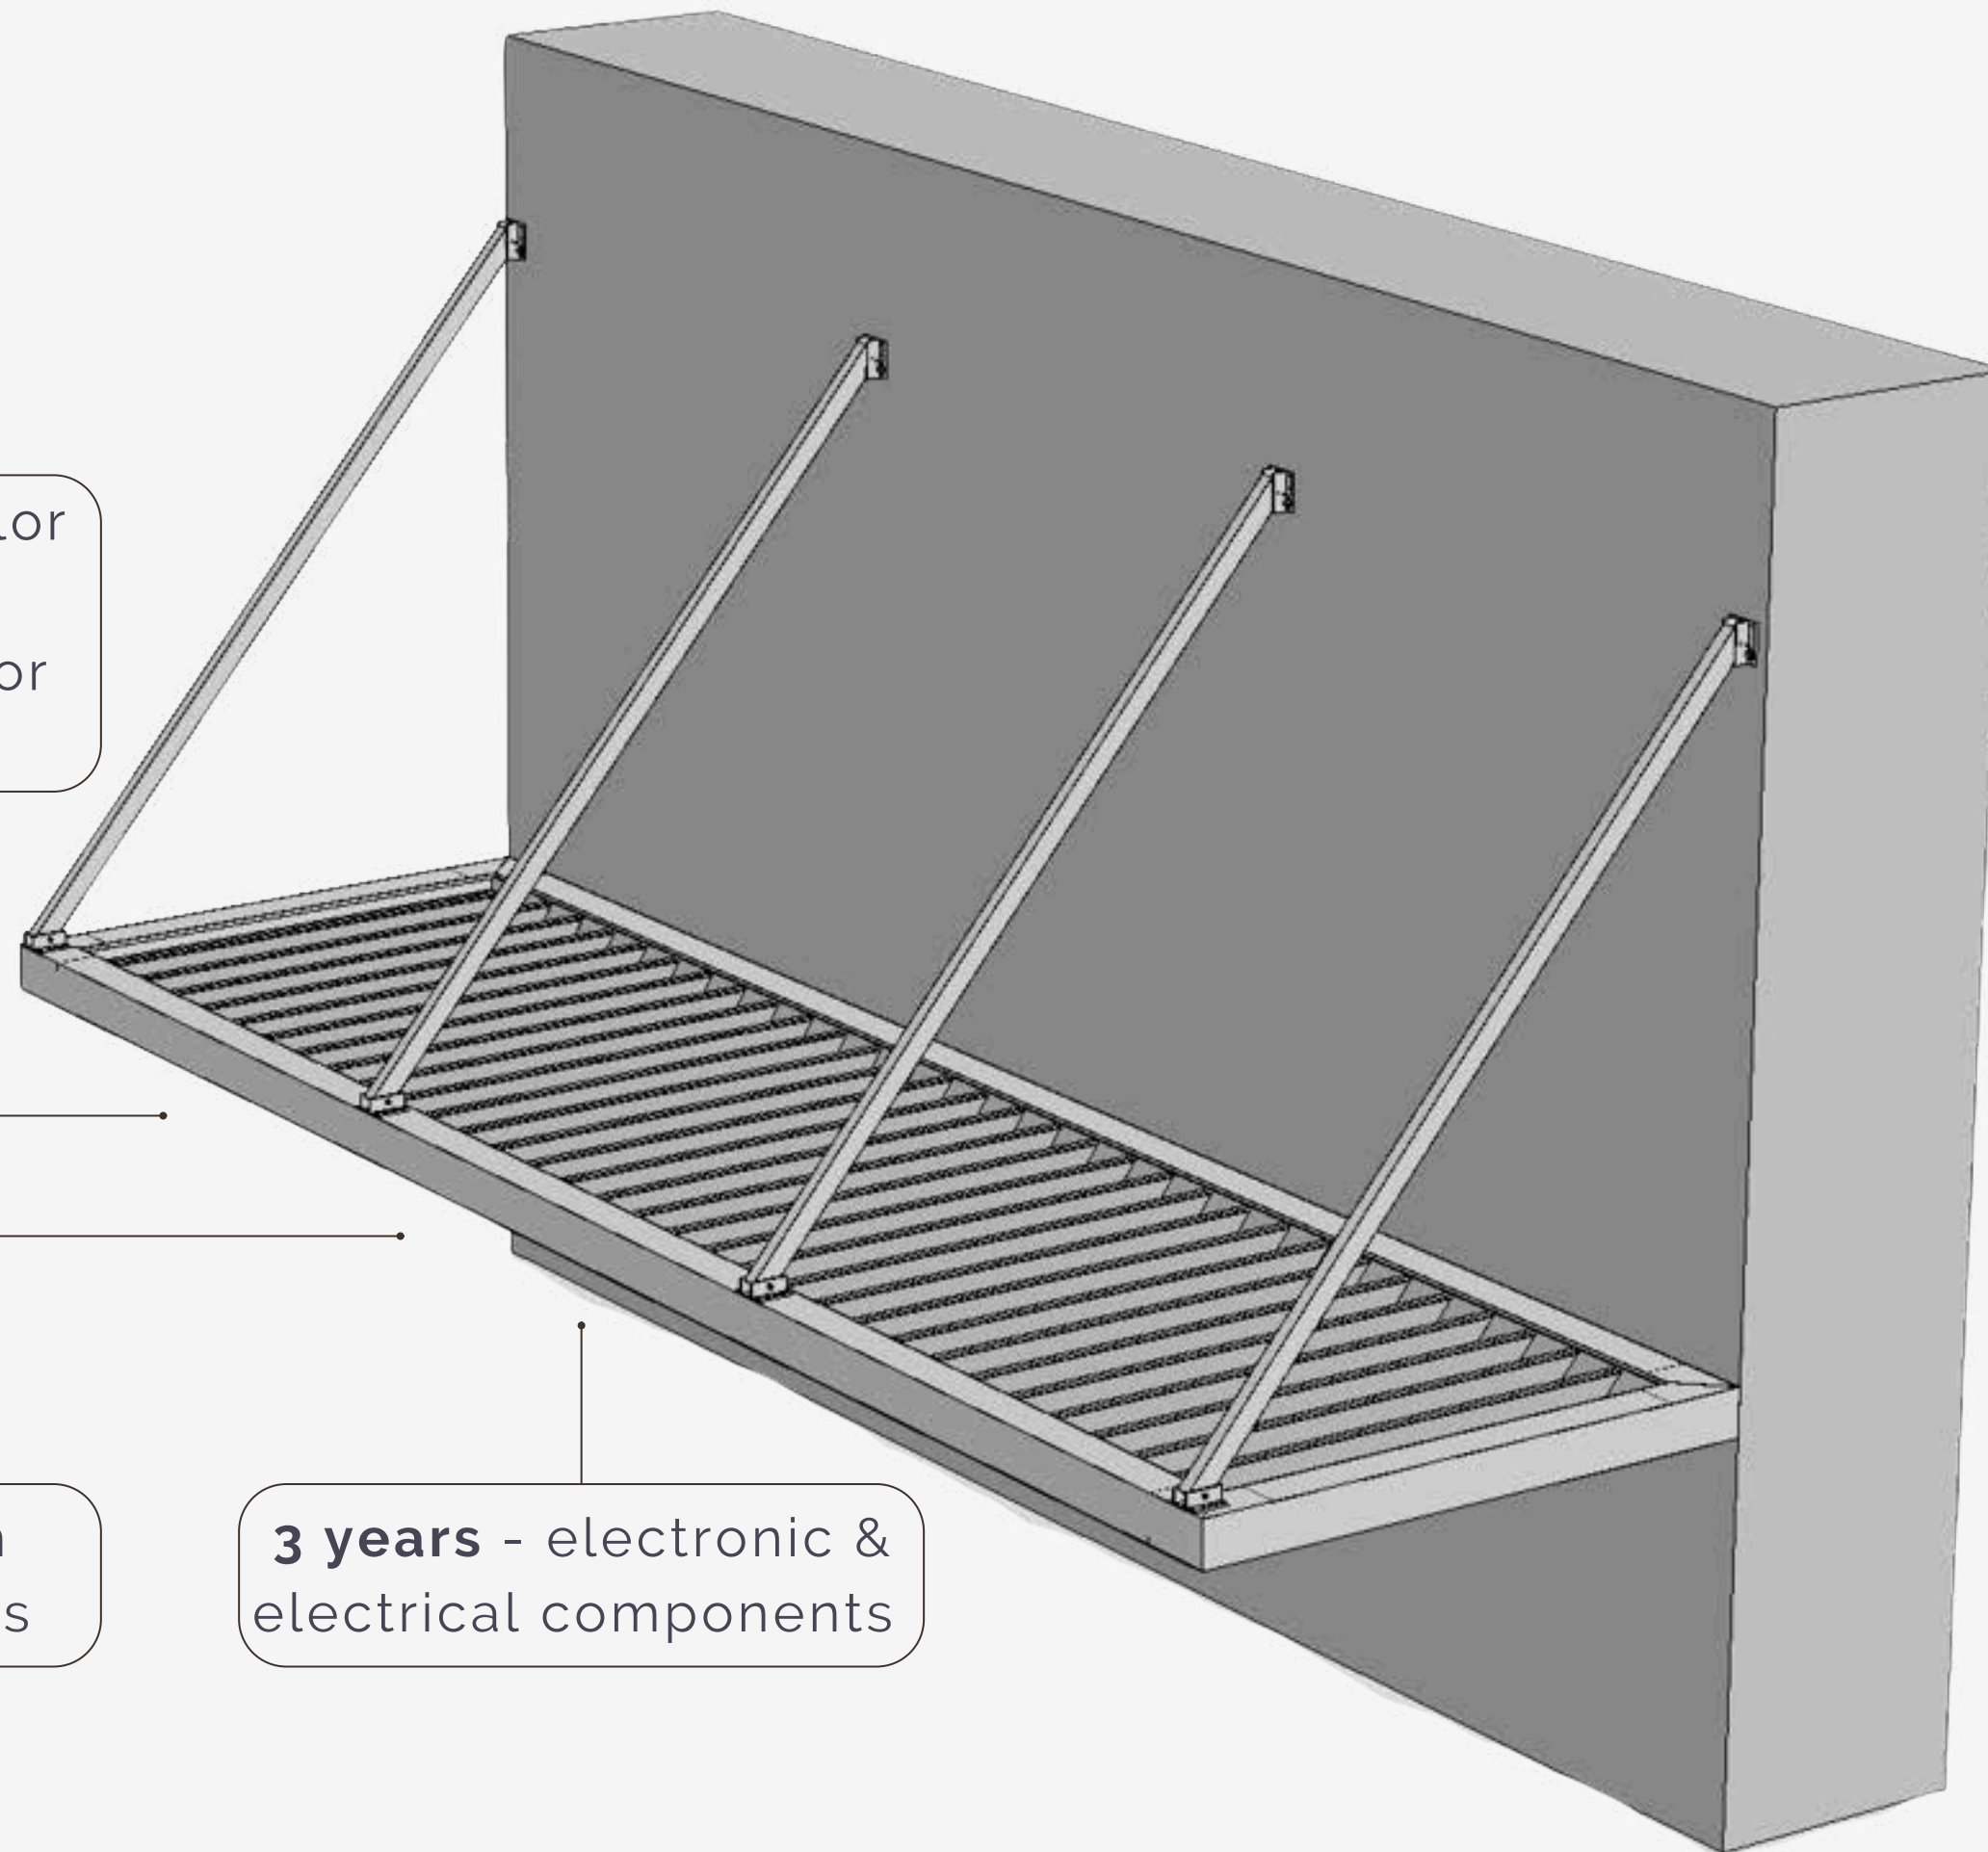

TECHNICAL SPECS

WARRANTY



COLOR CHART

LIGHTING

*Tie-Back Color: Same as frame

Color Chart

Frame Standard Colors

3 - 4 Weeks Lead Time




WHITE MAT SMOOTH



DARK GRAY TEXTURED



BLACK TEXTURED

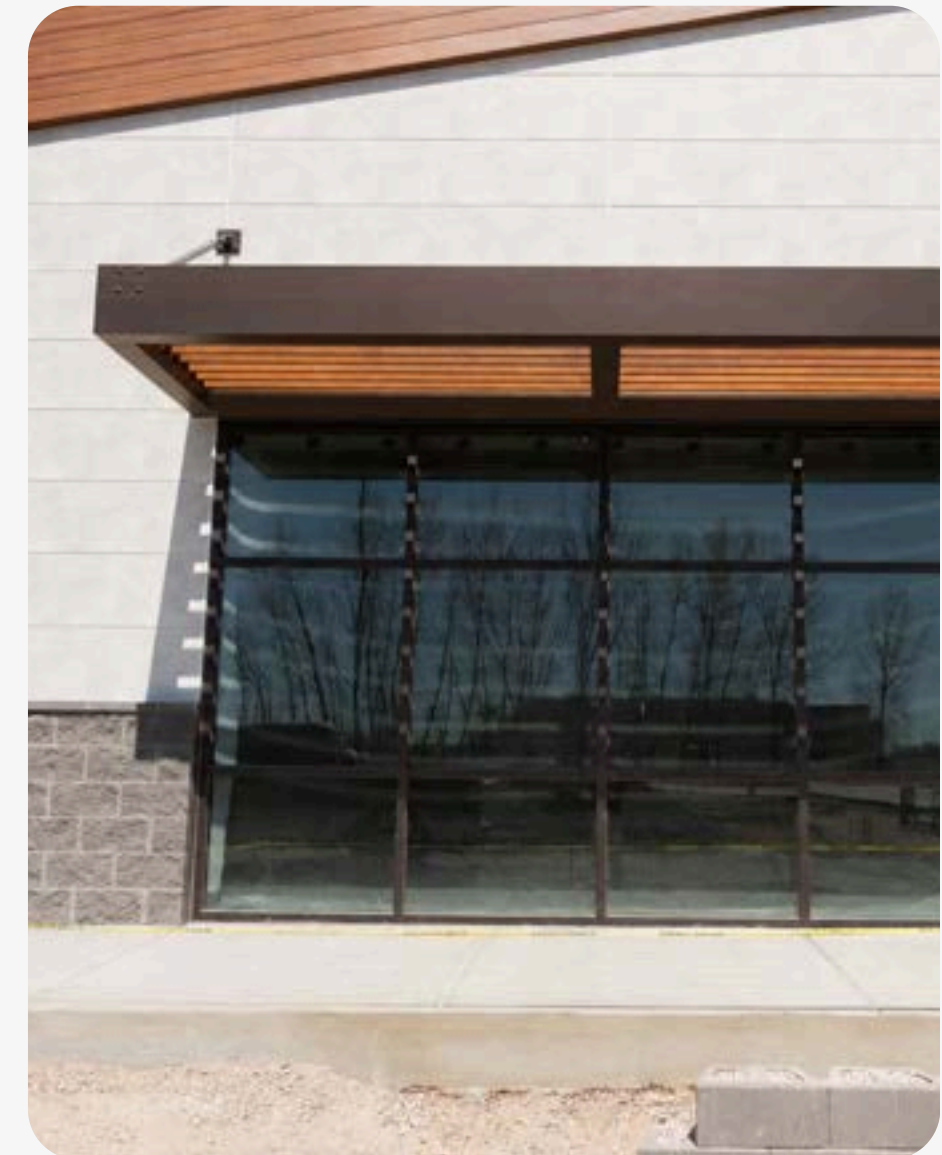

BRONZE TEXTURED

Color Chart

Frame Custom Colors

6 - 10 Weeks Lead Time



14 SHADES OF WOOD GRAIN FINISH

5 - 12 Weeks Lead Time



CUSTOM COLOR RAL OR MATCH

Panel Color Chart


Standard & Custom



STANDARD WHITE/WHITE



PREMIUM WHITE/WHITE
(EXTRA COST)

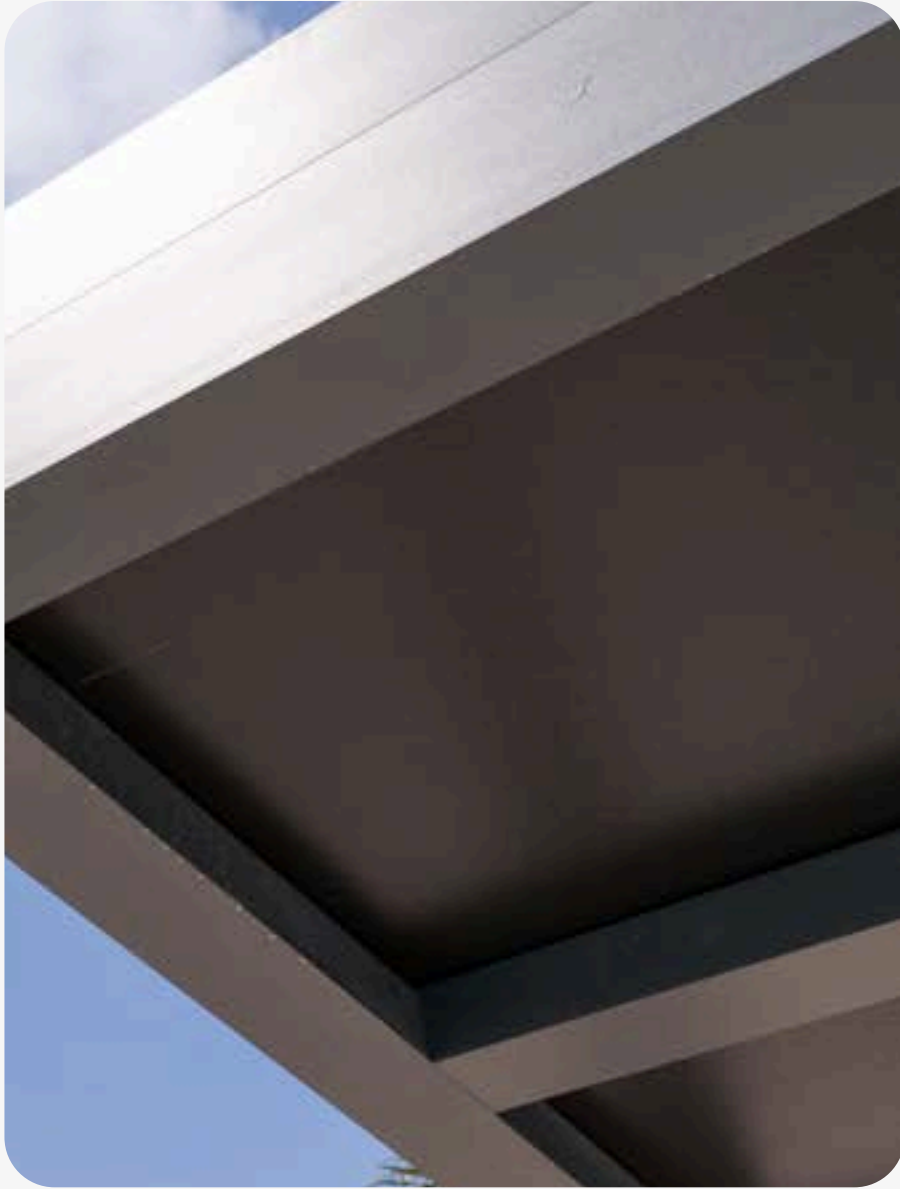

BRONZE/WHITE



WOOD GRAIN FINISH
(EXTRA COST)

Light Options

Lighting



RECESSED LIGHTS

Louvered Edition: Support Beam & Frame
Insulated Edition: Accessory Beam

Direct Lighting 4W - 24V - 320lm

Recommended - 2.5ft intervals, 1ft from frame.



LED BARS

Louvered Edition: Support Beam, Frame & Vertical Slats
Insulated Edition: Frame & Accessory Beam

Direct Lighting 12W - 24V - 630lm

Recommended - 3ft intervals, 1ft from frame



RGBW LED STRIPS

Insulated Edition: Either on length, width, or the entire frame.

Accent Lighting 4.5W/ft - 24V - 730lm



Life is Better Outside

(305) 306-3204 | azenco-outdoor.com